



2015 TIRE CATALOGUE

TRUCK AND BUS



ZC RUBBER AMERICA INC.

13463 Pumice Street, Norwalk, CA 90650
Tel: (562) 404-8383 Toll Free: 855-924-5678 Fax: (562) 404-8998
sales@zcrubberamerica.com
Web: www.zc-rubber.com





- A Company established in Year 1958
- No. 1 Tire Manufacturer in China
- No. 10 of Top 75 Global Tire Manufacturers in Year 2014
- Sale revenue reached USD4.88 billion in Year 2013

Zhongce Rubber Group Co., Ltd. (ZC-RUBBER) takes great pride in producing tires that rate among the best in the world. Our corporate philosophy is all about collaboration with our suppliers, with over 10,000s of companies who sell our products around the world, and with our millions of end customers who trust our tires every single day.

Our engineers are working together closely with our international Research and Development (R&D) team combined of Japanese and Korean experts. We keep on investing millions of US dollars in establishing various production and testing facilities such as the first noise test laboratorium in China and the MTS Flat-Trac III CT Tire Test

System. Since 2012, we joined and maintained the rank of the global top 10 tire manufacturer.

Our belief in producing quality tires makes us to set up quality control system approved by both global tire manufacturers and the famous car makers such as VOLVO, introduce world latest production facilities from Fischer, VMI, Krupp, etc, and inspect every single tire by hand before it leaves the production line besides the X-ray, balancing and uniformity inspection by most advanced equipments imported from Germany, Japan and U.S.A. We guarantee our tire quality by system, facilities and employees' responsibility.

Manufacturing Bases				
Advanced Production Facility				
Strict Quality Inspection				
R&D Center				



C O N T E N T S

Long Haul 5


Regional 12

Mixed Service 17

On-Road Heavy Duty Service 23

Limited Warranty 25



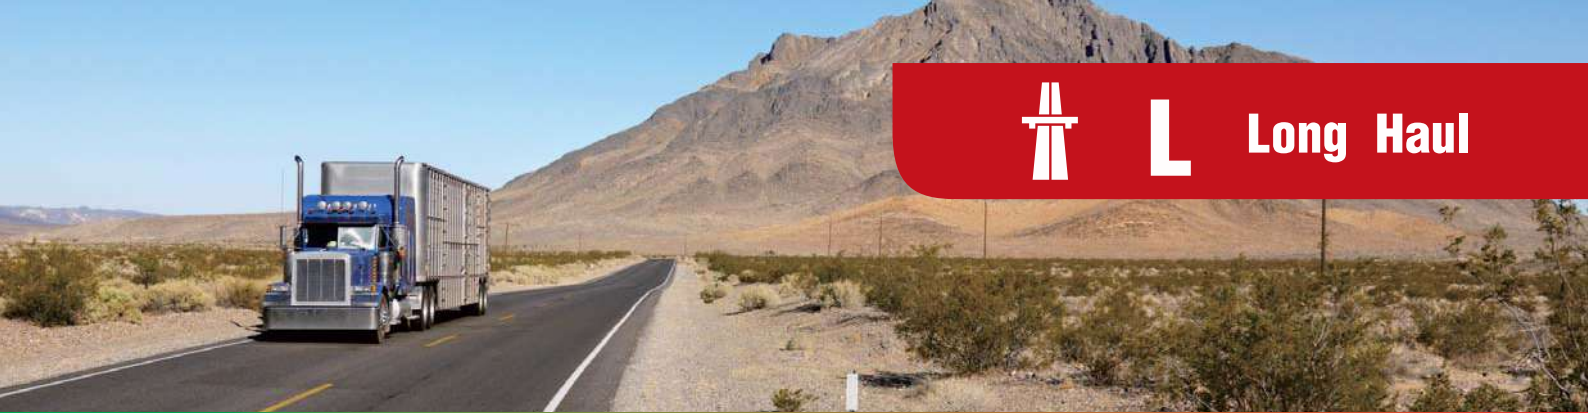

Long Haul



NEW

AT566


- Wide base super single tire applicable for both steer and trailer service
- Computer designed tread structure provide even wear with less pressure on the road
- Long life tread compound with less heating enhance the original tread life
- Strong steel belt improves the casing durability and promote multiple retreads



Long Haul

- Long distance journey with constant speed and less braking and accelerating
- Less fuel consumption and comfortable ride
- High mileage performance

SIZE	LR/PR	TREAD DEPTH (mm) (32nds)	SERVICE INDEX	STANDARD RIM	OVERALL DIAMETER (mm) (inch)	SECTION WIDTH (mm) (inch)	MAX. LOAD CAPACITY AT COLD INFLATION PRESSURE							
							SINGLE				DUAL			
							(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
445/50R22.5	L/20	13.0 16	161L	14.00	1018 40	445 17	4625	10200	830	120	-	-	-	-

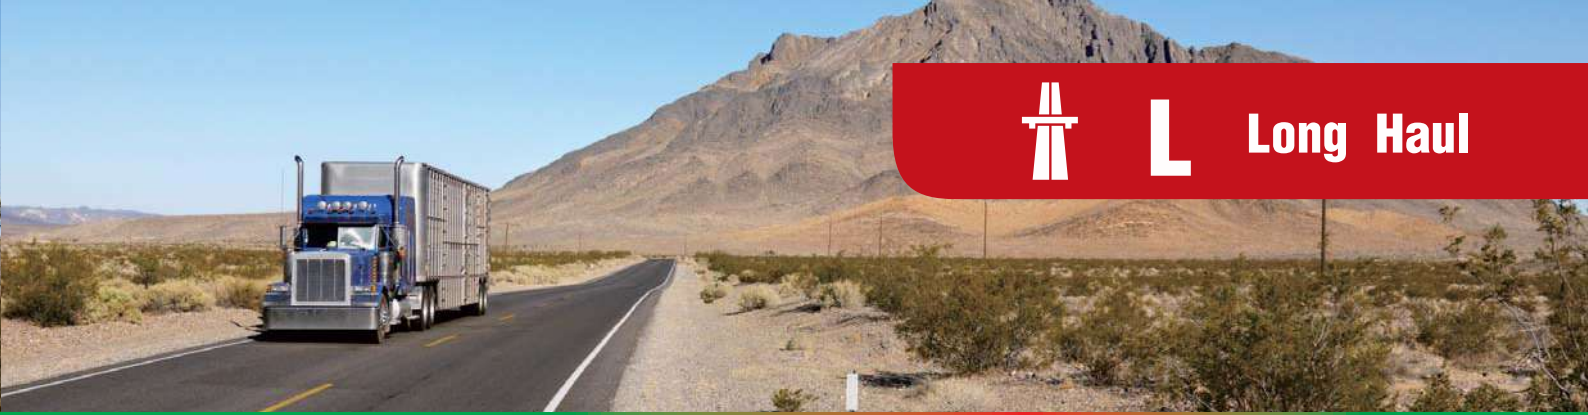

- Applicable for steer and free-rolling wheel position
- Five ribs with four straight grooves for precise handling
- Special designed tire casing for better mileage and more value for customers
- Cross rib sipes provide better wet traction and reduce external noise



AS678

SIZE	LR/PR	TREAD DEPTH (mm) (32nds)	SERVICE INDEX	STANDARD RIM	OVERALL DIAMETER (mm) (inch)		SECTION WIDTH (mm) (inch)		MAX. LOAD CAPACITY AT COLD INFLATION PRESSURE							
									SINGLE				DUAL			
									(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
11R22.5	H/16	14.2 18	148/145L	8.25	1054	41	279	11	3150	6940	850	123	2900	6390	850	123
295/75R22.5	G/14	14.2 18	144/141L	9.00	1014	40	298	12	2800	6175	760	110	2575	5675	760	105
11R24.5	H/16	14.2 18	149/146L	8.25	1104	43	279	11	3250	7160	830	120	3000	6610	830	120
285/75R24.5	G/14	14.2 18	144/141L	8.25	1050	41	283	11	2800	6175	760	110	2575	5675	760	110



- Five ribs with four wide, straight grooves for precise handling and outstanding traction
- Decoupling tread design suitable for long-distance travelling
- Applicable for steer and free-rolling wheel position



CR989

SIZE	LR/PR	TREAD DEPTH (mm) (32nds)	SERVICE INDEX	STANDARD RIM	OVERALL DIAMETER (mm) (inch)		SECTION WIDTH (mm) (inch)		MAX. LOAD CAPACITY AT COLD INFLATION PRESSURE							
									SINGLE				DUAL			
									(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
11R22.5	G/14	14.2 18	144/142L	8.25	1054	41	279	11	2800	6175	720	105	2650	5840	720	105
11R22.5	H/16	14.2 18	148/145M	8.25	1054	41	279	11	3150	6940	850	123	2900	6390	850	123
295/75R22.5	G/14	14.2 18	144/141L	9.00	1014	40	298	12	2800	6175	760	110	2575	5675	760	105
295/75R22.5	H/16	14.2 18	146/143L	9.00	1014	40	298	12	3000	6610	830	120	2725	6005	830	120
11R24.5	G/14	15.0 19	146/143L	8.25	1104	43	279	11	3000	6610	720	105	2725	6005	720	120
11R24.5	H/16	15.0 19	149/146L	8.25	1104	43	279	11	3250	7160	830	120	3000	6610	830	120
285/75R24.5	G/14	15.0 19	144/141L	8.25	1050	41	283	11	2800	6175	760	110	2575	5675	760	131



- Applicable for drive wheel position on long-distance and regional transportation
- Solid close shoulder design with special tread compound for enhanced traction
- Computer designed carcass reduces pressure on road and promotes even wear
- Improved casing structure provides remarkable footprint which guarantees longer tread life



AD757

SIZE	LR/PR	TREAD DEPTH (mm) (32nds)	SERVICE INDEX	STANDARD RIM	OVERALL DIAMETER (mm) (inch)		SECTION WIDTH (mm) (inch)		MAX. LOAD CAPACITY AT COLD INFLATION PRESSURE							
									SINGLE				DUAL			
									(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
11R22.5	H/16	20.6 26	148/145/L	8.25	1054	41	279	11	3150	6940	850	123	2900	6390	850	123
295/75R22.5	G/14	20.6 26	144/141L	9.00	1014	40	298	12	2800	6175	760	110	2575	5675	760	105
11R24.5	H/16	20.6 26	149/146L	8.25	1104	43	279	11	3250	7160	830	120	3000	6610	830	120
285/75R24.5	G/14	20.6 26	144/141L	8.25	1050	41	283	11	2800	6175	760	110	2575	5675	760	110

- Wider tread spreads load over a larger area, promoting long, even wear in steer and free-rolling wheel position
- Straight simple rib pattern improves even wearing and efficient water evacuation for excellent wet traction and handling
- Cross rib sipes slice through water for solid control on wet roads
- Decoupling tread design suitable for long-distance travelling



CR960

SIZE	LR/PR	TREAD DEPTH (mm) (32nds)	SERVICE INDEX	STANDARD RIM	OVERALL DIAMETER (mm) (inch)		SECTION WIDTH (mm) (inch)		MAX. LOAD CAPACITY AT COLD INFLATION PRESSURE							
									SINGLE				DUAL			
									(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
11R22.5	G/14	14.2 18	144/142L	8.25	1054	41	279	11	2800	6175	720	105	2650	5840	720	105
11R22.5	H/16	14.2 18	148/145M	8.25	1054	41	279	11	3150	6940	850	123	2900	6390	850	123
295/80R22.5	H/16	15.0 19	150/147M	9.00	1044	41	298	12	3350	7390	830	120	3075	6780	830	120
295/80R22.5	J/18	15.0 19	152/149M	9.00	1044	41	298	12	3550	7830	900	131	3250	7160	900	131
11R24.5	G/14	14.2 18	146/143L	8.25	1104	43	279	11	3000	6610	720	105	2725	6005	720	105
11R24.5	H/16	14.2 18	149/146L	8.25	1104	43	279	11	3250	7160	830	120	3000	6610	830	120



- Five ribs with four wide, straight grooves for precise handling and outstanding traction
- Stone ejector platforms prevent stones from lodging in grooves and drilling into belts
- Shallower tread depth helps to resist treadsquirm and irregular wear forces for exceptionally long mileage



CR976A

SIZE	LR/PR	TREAD DEPTH (mm) (32nds)	SERVICE INDEX	STANDARD RIM	OVERALL DIAMETER (mm) (inch)	SECTION WIDTH (mm) (inch)	MAX. LOAD CAPACITY AT COLD INFLATION PRESSURE							
							SINGLE				DUAL			
							(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
9.00R20	H/16	14.5 18	144/142L	7.0	1019 40	259 10	2800	6175	900	130	2650	5840	900	130
10.00R20	H/16	15.0 19	146/143K	7.5	1054 41	278 11	3000	6610	830	120	2725	6005	830	120
11.00R20	H/16	15.5 20	150/147K	8.0	1085 43	293 12	3350	7390	830	120	3075	6780	830	120
11.00R20	J/18	15.5 20	152/149K	8.0	1085 43	293 12	3550	7825	930	135	3250	7165	930	135
12.00R20	J/18	17.0 21	154/151K	8.5	1125 44	315 12	3750	8270	830	120	3450	7610	830	120
215/75R17.5	H/16	12.5 16	135/133J	6.00	767 30	211 8	2180	4805	850	123	2060	4540	850	123
225/70R19.5	F/12	13.0 16	125/123M	6.75	811 32	226 9	1650	3640	660	95	1550	3415	660	95
225/70R19.5	G/14	13.0 16	128/126M	6.75	811 32	226 9	1800	3970	760	110	1700	3750	760	110
245/70R19.5	G/14	13.0 16	133/131M	7.50	839 33	248 10	2060	4540	760	110	1950	4300	760	110
245/70R19.5	H/16	13.0 16	136/134M	7.50	839 33	248 10	2240	4940	830	120	2120	4675	830	120
265/70R19.5	H/16	14.0 18	140/138M	7.50	867 34	262 10	2500	5510	775	112	2360	5200	775	112
265/70R19.5	J/18	14.0 18	143/141L	7.50	867 34	262 10	2725	6005	850	123	2575	5675	850	123
11R22.5	G/14	15.5 20	144/142M	8.25	1054 41	279 11	2800	6175	720	105	2650	5840	720	105
11R22.5	H/16	15.5 20	148/145M	8.25	1054 41	279 11	3150	6940	850	123	2900	6390	850	123
12R22.5	H/16	15.5 20	150/147L	9.00	1085 43	300 12	3350	7390	830	120	3075	6780	830	120
12R22.5	J/18	15.5 20	152/149L	9.00	1085 43	300 12	3550	7830	930	135	3250	7160	930	135
255/70R22.5	H/16	14.5 18	140/137M	7.50	930 37	255 10	2500	5510	800	116	2300	5070	800	116
275/70R22.5	H/16	14.0 18	148/145M	8.25	958 38	276 11	3150	6940	900	130	2900	6395	900	130
275/80R22.5	H/16	14.0 18	149/146M	8.25	1012 40	276 11	3250	7165	850	123	3000	6610	850	123
295/80R22.5	J/18	15.0 19	152/149M	9.00	1044 41	298 12	3550	7830	900	131	3250	7160	900	131
315/80R22.5	J/18	16.0 20	154/151M(156/150L)	9.00	1076 42	312 12	3750	8270	830	120	3450	7610	830	120
385/65R22.5	J/18	15.5 20	158L(160K)	11.75	1072 42	389 15	4250	9370	850	125	-	-	-	-
385/65R22.5	L/20	15.5 20	160K(158L)	11.75	1072 42	389 15	4500	9920	900	130	-	-	-	-
425/65R22.5	L/20	15.0 19	165K	13.00	1124 44	430 17	5150	11340	825	120	-	-	-	-
445/65R22.5	L/20	15.0 19	169K	14.00	1150 45	444 17	5800	12775	900	130	-	-	-	-



- Wide and deep tread helps to promote even wear and long tread life resulting in low cost per mile
- Solid close shoulder ribs help to improve even wear
- Three deep grooves evacuate water efficiently for traction
- Strong casing resists cuts and punctures for enhanced toughness and long casing life



CM983

SIZE	LR/PR	TREAD DEPTH (mm) (32nds)	SERVICE INDEX	STANDARD RIM	OVERALL DIAMETER (mm) (inch)	SECTION WIDTH (mm) (inch)	MAX. LOAD CAPACITY AT COLD INFLATION PRESSURE							
							SINGLE				DUAL			
							(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
11R22.5	G/14	20.6 26	144/142L	8.25	1065 42	279 11	2800	6175	720	105	2650	5840	720	105
11R22.5	H/16	20.6 26	148/145L	8.25	1065 42	279 11	3150	6940	850	123	2900	6390	850	123
295/75R22.5	G/14	20.6 26	144/141L	9.00	1020 42	298 12	2800	6175	760	110	2575	5675	760	110
295/75R22.5	H/16	20.6 26	146/143M	9.00	1020 42	298 12	3000	6610	830	120	2725	6005	830	120
11R24.5	G/14	20.6 26	146/143L	8.25	1116 44	279 11	3000	6610	720	105	2725	6005	720	105
11R24.5	H/16	20.6 26	149/146L	8.25	1116 44	279 11	3250	7160	830	120	3000	6610	830	120
285/75R24.5	G/14	20.6 26	144/141L	8.25	1056 42	283 11	2800	6175	760	110	2575	5675	760	110



- Cool-running compound construction reduces the energy generated within the tread for low rolling resistance
- Shallow tread depth promotes low rolling resistance for fuel economy and long even wear
- Four wide grooves provide all-season performance on wet and dry roads



CR915

SIZE	LR/PR	TREAD DEPTH (mm) (32nds)	SERVICE INDEX	STANDARD RIM	OVERALL DIAMETER (mm) (inch)	SECTION WIDTH (mm) (inch)	MAX. LOAD CAPACITY AT COLD INFLATION PRESSURE							
							SINGLE				DUAL			
							(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
11R22.5	G/14	11.0 14	144/142M	8.25	1054 41	279 11	2800	6175	720	105	2650	5840	720	105
295/75R22.5	G/14	11.0 14	144/141M	9.00	1014 40	298 12	2800	6175	760	110	2575	5675	760	110



L Long Haul



- Wide base multi-rib trailer tires with durable compound to deliver excellent value
- Strong casing structure offers multiple retreads and lower total cost
- Improved tread design promises outstanding stability with optimized footprint and better tire life



CR931

SIZE	LR/PR	TREAD DEPTH (mm) (32nds)	SERVICE INDEX	STANDARD RIM	OVERALL DIAMETER (mm) (inch)		SECTION WIDTH (mm) (inch)		MAX. LOAD CAPACITY AT COLD INFLATION PRESSURE							
									SINGLE				DUAL			
									(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
12R22.5	H/16	15.5 20	150/147L	9.00	1085	43	300	12	3350	7390	830	120	3075	6780	830	120
12R22.5	J/18	15.5 20	152/149L	9.00	1085	43	300	12	3550	7830	930	135	3250	7160	930	135
295/80R22.5	J/18	15.0 19	152/149M	9.00	1044	41	298	12	3550	7830	900	131	3250	7160	900	131
315/80R22.5	J/18	15.0 19	154/151M(156/150L)	9.00	1076	42	312	12	3750	8273	830	120	3450	7610	830	120
385/65R22.5	J/18	15.5 20	158L(160K)	11.75	1072	42	389	15	4250	9370	850	125	-	-	-	-
385/65R22.5	L/20	15.5 20	160K(158L)	11.75	1072	42	389	15	4500	9920	900	130	-	-	-	-
425/65R22.5	L/20	15.0 19	165K	13.00	1124	44	430	17	5150	11340	825	120	-	-	-	-
445/65R22.5	L/20	15.0 19	169K	14.00	1150	45	444	17	5800	12775	900	130	-	-	-	-



- Wide base with high saturation for maximum mileage efficiency
- Optimised bead construction for better durability
- Scuff resistance ribs protect sidewall from curbing and cutting



AT559

SIZE	LR/PR	TREAD DEPTH (mm) (32nds)	SERVICE INDEX	STANDARD RIM	OVERALL DIAMETER (mm) (inch)		SECTION WIDTH (mm) (inch)		MAX. LOAD CAPACITY AT COLD INFLATION PRESSURE							
									SINGLE				DUAL			
									(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
12R22.5	H/16	16.5 21	150/147L	9.00	1085	43	300	12	3350	7390	830	120	3075	6780	830	120
12R22.5	J/18	16.5 21	152/149L	9.00	1085	43	300	12	3550	7830	930	135	3250	7160	930	135
295/80R22.5	J/18	15.5 20	152/149L	9.00	1044	41	298	12	3550	7830	900	131	3250	7160	900	131
315/80R22.5	J/18	16.0 20	154/151M(156/150L)	9.00	1076	42	312	12	3750	8273	830	120	3450	7610	830	120
385/65R22.5	J/18	15.5 20	158L(160K)	11.75	1072	42	389	15	4250	9370	850	125	-	-	-	-
385/65R22.5	L/20	15.5 20	160K(158L)	11.75	1072	42	389	15	4500	9920	900	130	-	-	-	-
415/45R22.5	L/20	15.5 20	156K	14.00	946	37	416	16	4000	8820	800	116	-	-	-	-
425/65R22.5	L/20	15.5 20	165K	13.00	1124	44	430	17	5150	11340	825	120	-	-	-	-
445/65R22.5	L/20	15.5 20	169K	14.00	1150	45	444	17	5800	12775	900	130	-	-	-	-



R Regional

- Shorter journey with frequent braking, accelerating and turning
- Improved road grip with maximum mileage
- Exceptional tough type



- Improved close shoulder helps to improve even wear resulting in long tread life
- Straight simple rib pattern improves even wearing and efficient water evacuation for excellent wet traction and handling
- Cross rib sipes slice through water for solid control on wet roads



CR960A

SIZE	LR/PR	TREAD DEPTH (mm) (32nds)	SERVICE INDEX	STANDARD RIM	OVERALL DIAMETER (mm) (inch)	SECTION WIDTH (mm) (inch)	MAX. LOAD CAPACITY AT COLD INFLATION PRESSURE							
							SINGLE				DUAL			
							(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
7.50R16	G/14	12.0 15	122/118L	6.00G	805 32	215 8	1500	3305	770	112	1320	2910	770	112
8.25R16	G/14	13.0 16	128/126L	6.50H	855 34	235 9	1800	3970	670	97	1700	3750	670	97
8.25R16	H/16	13.0 16	128/124L	6.50H	855 34	235 9	1800	3970	770	112	1600	3525	770	112
245/70R17.5	H/16	13.0 16	136/134M	7.50	789 31	248 10	2240	4940	850	123	2120	4675	850	123
205/75R17.5	F/12	12.0 15	122/120M	6.00	753 30	205 8	1500	3305	675	98	1400	3085	675	98
205/75R17.5	G/14	12.0 15	124/122M	6.00	753 30	205 8	1600	3525	750	109	1500	3305	750	109
215/75R17.5	G/14	12.5 16	126/124M	6.00	767 30	211 8	1700	3750	700	102	1600	3525	700	102
215/75R17.5	H/16	12.5 16	135/133J	6.00	767 30	211 8	2180	4805	850	123	2060	4540	850	123
225/75R17.5	G/14	12.5 16	129/127M	6.75	783 31	226 9	1850	4080	725	105	1750	3860	725	105
235/75R17.5	G/14	13.3 17	132/130M	6.75	797 31	233 9	2000	4410	775	112	1900	4190	775	112
235/75R17.5	H/16	13.3 17	143/141J	6.75	797 31	233 9	2725	6005	875	128	2575	5675	875	128
8R19.5	F/12	13.0 16	124/122L	6.00	859 34	203 8	1600	3525	760	110	1500	3305	760	110
225/70R19.5	F/12	13.0 16	125/123M	6.75	811 32	226 9	1650	3640	660	95	1550	3415	660	95
245/70R19.5	G/14	13.0 16	133/131M	7.50	839 33	248 10	2060	4540	760	110	1950	4300	760	110
245/70R19.5	H/16	13.0 16	136/134M	7.50	839 33	248 10	2240	4940	825	120	2120	4675	825	120
285/70R19.5	H/16	14.5 18	148/145M	8.25	895 35	283 11	3150	6940	850	123	2900	6395	850	123
285/70R19.5	J/18	14.5 18	150/148L	8.25	895 35	283 11	3350	7390	900	130	3150	6940	900	130
11R22.5	G/14	14.2 18	144/142L	8.25	1054 41	279 11	2800	6175	720	105	2650	5840	720	105
11R22.5	H/16	14.2 18	148/145M	8.25	1054 41	279 11	3150	6940	850	123	2900	6390	850	123
12R22.5	J/18	15.5 20	152/149L	9.00	1085 43	300 12	3550	7830	930	135	3250	7160	930	135
295/75R22.5	G/14	14.2 18	144/141L	9.00	1014 40	298 12	2800	6175	760	110	2575	5675	760	110
315/80R22.5	J/18	15.0 19	154/151M(156/150L)	9.00	1076 42	312 12	3750	8270	830	120	3450	7610	830	120
11R24.5	G/14	14.2 18	146/143L	8.25	1104 43	279 11	3000	6610	720	105	2725	6005	720	105
11R24.5	H/16	14.2 18	149/146L	8.25	1104 43	279 11	3250	7160	830	120	3000	6610	830	120
285/75R24.5	G/14	14.2 18	144/141L	8.25	1050 41	283 11	2800	6175	760	110	2575	5675	760	110



- Strong tire carcass offers lateral durability for regional application
- Good damage protection and even wear profile feature outstanding performance in all conditions
- Excellent traction and good handling



AT560

SIZE	LR/PR	TREAD DEPTH (mm) (32nds)	SERVICE INDEX	STANDARD RIM	OVERALL DIAMETER (mm) (inch)	SECTION WIDTH (mm) (inch)	MAX. LOAD CAPACITY AT COLD INFLATION PRESSURE							
							SINGLE				DUAL			
							(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
385/65R22.5	J/18	16.0 20	158L(160K)	11.75	1072 42	389 15	4250	9370	850	125	-	-	-	-
385/65R22.5	L/20	16.0 20	160K(158L)	11.75	1072 42	389 15	4500	9920	900	130	-	-	-	-



- Tread pattern provides extended even wear and offers excellent wet traction
- Advanced compound promotes mileage before removal for long tire life



CR950

SIZE	LR/PR	TREAD DEPTH (mm) (32nds)	SERVICE INDEX	STANDARD RIM	OVERALL DIAMETER (mm) (inch)	SECTION WIDTH (mm) (inch)	MAX. LOAD CAPACITY AT COLD INFLATION PRESSURE							
							SINGLE				DUAL			
							(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
7.50R16	G/14	12.0 15	122/118L	6.00G	805 32	215 8	1500	3305	770	112	1320	2910	770	112
8.25R16	H/16	14.0 18	128/124L	6.50H	855 34	235 9	1800	3970	770	112	1600	3525	770	112
7.50R20	G/14	13.0 16	130/128L	6.0	935 37	215 8	1900	4190	830	120	1800	3970	830	120
8.25R20	H/16	14.0 18	139/137K	6.5	974 38	236 9	2430	5360	930	135	2300	5070	930	135
8.5R17.5	F/12	12.0 15	121/120L	6.00	802 32	215 8	1450	3200	625	91	1400	3090	625	91
9.5R17.5	G/14	13.0 16	129/127L	6.75	842 33	240 9	1850	4080	750	109	1750	3860	750	109
9.5R17.5	H/16	13.0 16	143/141J	6.75	842 33	240 9	2725	6005	875	128	2575	5675	875	128
8R22.5	G/14	13.5 17	130/128M	6.00	935 37	203 8	1900	4190	830	120	1800	3970	830	120
9R22.5	G/14	14.0 18	136/134M	6.75	974 38	229 9	2240	4940	830	120	2120	4675	830	120
10R22.5	G/14	15.0 19	141/139M	7.50	1019 40	254 10	2575	5675	790	115	2430	5355	790	115
10R22.5	H/16	15.0 19	144/142M	7.50	1019 40	254 10	2800	6175	850	123	2650	5840	850	123



- Four ribs ensure even wear and comfortable riding
- Siped zig-zag rib helps improve traction on wet and muddy surface
- Deep circumferential grooves improves efficient water evacuation, lateral stability, and long tire life



CM912

SIZE	LR/PR	TREAD DEPTH (mm) (32nds)	SERVICE INDEX	STANDARD RIM	OVERALL DIAMETER (mm) (inch)	SECTION WIDTH (mm) (inch)	MAX. LOAD CAPACITY AT COLD INFLATION PRESSURE							
							SINGLE				DUAL			
							(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
12.00R24	L/20	19.0 24	160/157K	8.5	1226 48	315 12	4500	9920	900	131	4125	9090	900	131



- Wide and deep tread enhances cost per mileage, driving stability and traction on highway application
- Aggressive traction blocks helps to increase wet traction
- Strong open shoulder produces powerful traction
- Suitable for single axle vehicles



CM980

SIZE	LR/PR	TREAD DEPTH (mm) (32nds)	SERVICE INDEX	STANDARD RIM	OVERALL DIAMETER (mm) (inch)	SECTION WIDTH (mm) (inch)	MAX. LOAD CAPACITY AT COLD INFLATION PRESSURE							
							SINGLE				DUAL			
							(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
11R22.5	G/14	20.6 26	144/142L	8.25	1065 42	279 11	2800	6175	720	105	2650	5840	720	105
11R22.5	H/16	20.6 26	148/145L	8.25	1085 42	279 11	3150	6940	850	123	2900	6390	850	123
295/75R22.5	G/14	20.6 26	144/141L	9.00	1085 40	298 12	2800	6175	760	110	2575	5675	760	110
295/75R22.5	H/16	20.6 26	146/143M	9.00	1085 40	298 12	3000	6610	830	120	2725	6005	830	120
11R24.5	G/14	20.6 26	146/143L	8.25	1050 44	279 11	3000	6610	720	105	2725	6005	720	105
11R24.5	H/16	20.6 26	149/146L	8.25	1050 44	279 11	3250	7160	830	120	3000	6610	830	120
285/75R24.5	G/14	20.6 26	144/141L	8.25	1082 42	283 11	2800	6175	760	110	2575	5675	760	110



- Traction block tread design for high drive wheel efficiency in all seasons
- Aggressive blading helps provide road-gripping traction
- Open shoulder produces powerful traction on wet and dry roads



CM986

SIZE	LR/PR	TREAD DEPTH (mm) (32nds)	SERVICE INDEX	STANDARD RIM	OVERALL DIAMETER (mm) (inch)	SECTION WIDTH (mm) (inch)	MAX. LOAD CAPACITY AT COLD INFLATION PRESSURE							
							SINGLE				DUAL			
							(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
205/75R17.5	G/14	14.0 18	124/122M	6.00	753 30	205 8	1600	3525	750	109	1500	3305	750	109
215/75R17.5	G/14	14.5 18	126/124M	6.00	767 30	211 8	1700	3750	700	102	1600	3525	700	102
215/75R17.5	H/16	14.5 18	135/133J	6.00	767 30	211 8	2180	4805	850	123	2060	4540	850	123
225/75R17.5	G/14	14.5 18	129/127M	6.75	783 31	226 9	1850	4080	725	105	1750	3860	725	105
235/75R17.5	G/14	15.4 19	132/130M	6.75	797 31	233 9	2000	4410	775	112	1900	4190	775	112
235/75R17.5	H/16	15.4 19	143/141J	6.75	797 31	233 9	2725	6005	875	128	2575	5675	875	128
245/70R17.5	H/16	15.0 19	136/134M	7.50	789 31	248 10	2240	4940	850	123	2120	4675	850	123
245/70R17.5	J/18	15.0 19	143/141J	7.50	789 31	248 10	2725	6005	875	128	2575	5675	875	128
225/70R19.5	F/12	15.0 19	125/123M	6.75	811 32	226 9	1650	3640	660	95	1550	3415	660	95
245/70R19.5	H/16	15.4 19	136/134M	7.50	839 33	248 10	2240	4940	825	120	2120	4675	825	120
245/70R19.5	G/14	15.4 19	133/131M	7.50	839 33	248 10	2060	4540	760	110	1950	4300	760	110
285/70R19.5	H/16	16.0 20	148/145M	8.25	895 35	283 11	3150	6940	850	123	2900	6395	850	123
285/70R19.5	J/18	16.0 20	150/148L	8.25	895 35	283 11	3350	7390	900	130	3150	6940	900	130



- Special drive pattern with open shoulder provides good traction in wet and dry roads
- Durable tire casing enhances tire life



CM954

SIZE	LR/PR	TREAD DEPTH (mm) (32nds)	SERVICE INDEX	STANDARD RIM	OVERALL DIAMETER (mm) (inch)	SECTION WIDTH (mm) (inch)	MAX. LOAD CAPACITY AT COLD INFLATION PRESSURE							
							SINGLE				DUAL			
							(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
10.00R20	H/16	16.0 20	146/143K	7.5	1054 41	278 11	3000	6610	830	120	2725	6005	830	120
10.00R20	J/18	16.0 20	149/146J	7.5	1054 41	278 11	3250	7160	930	135	3000	6610	930	135
11.00R20	H/16	15.0 19	150/147K	8.0	1085 43	293 12	3350	7390	830	120	3075	6780	830	120
11.00R20	J/18	15.0 19	152/149K	8.0	1085 43	293 12	3550	7825	930	135	3250	7165	930	135
11R22.5	G/14	16.0 20	144/142 L	8.25	1054 41	279 11	2800	6175	720	105	2650	5840	720	105
11R22.5	H/16	16.0 20	148/145M	8.25	1054 41	279 11	3150	6940	850	123	2900	6390	850	123



M

Mixed Service
On & Off



- Excellent traction for ON/OFF drive axle application
- Aggressive and optimum self-cleaning tread with lateral grooves provides remarkable performance in all weather conditions both on and off the roads



MD738

SIZE	LR/PR	TREAD DEPTH (mm) (32nds)		SERVICE INDEX	STANDARD RIM	OVERALL DIAMETER (mm) (inch)		SECTION WIDTH (mm) (inch)		MAX. LOAD CAPACITY AT COLD INFLATION PRESSURE							
										SINGLE				DUAL			
										(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
9.5R17.5	H/16	16.5	21	143/141J	6.75	842	33	240	9	2725	6005	875	128	2575	5675	875	128
11R22.5	G/14	20.6	26	144/142L	8.25	1065	42	279	11	2800	6175	720	105	2650	5840	720	105
11R22.5	H/16	20.6	26	148/145L	8.25	1085	42	279	11	3150	6940	850	123	2900	6390	850	123
12R22.5	H/16	20.6	26	150/147L	9.00	1085	43	300	12	3350	7390	830	120	3075	6780	830	120
12R22.5	J/18	20.6	26	152/149L	9.00	1085	43	300	12	3550	7830	930	135	3250	7160	930	135
275/70R22.5	H/16	18.0	23	148/145J	8.25	958	38	276	11	3150	6940	900	130	2900	6395	900	130
295/80R22.5	J/18	20.6	26	152/149L	9.00	1050	41	298	12	3550	7830	900	131	3250	7160	900	131
11R24.5	H/16	22.6	28	146/143L	8.25	1050	44	279	11	3000	6610	720	105	2725	6005	720	105
11R24.5	J/18	22.6	28	149/146L	8.25	1050	44	279	11	3250	7160	830	120	3000	6610	830	120



- Premium tyre designed for drive position applicable for rough road surface
- Aggressive direction tread with robust tread blocks providing extra traction for on/off road condition
- Special rubber compound ensuring more resistance to cuts and tearing



MD777

SIZE	LR/PR	TREAD DEPTH (mm) (32nds)		SERVICE INDEX	STANDARD RIM	OVERALL DIAMETER (mm) (inch)		SECTION WIDTH (mm) (inch)		MAX. LOAD CAPACITY AT COLD INFLATION PRESSURE							
										SINGLE				DUAL			
										(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
315/80R22.5	J/18	23.0	29	154/151L(156/150K)	9.00	1082	43	312	12	3750	8270	830	120	3450	7610	830	120



M

Mixed Service
Mining

- Used both on and off road
- Heavy loads and outstanding durability
- Special protection against the damage caused by the road condition



M Mixed Service
On & Off



M Mixed Service
On & Off



- Wide, deep tread helps provide long tread life in regional conditions
- Zig-zag ribs ensure even wear and grip on wet, dry and snowy roads



CM988

SIZE	LR/PR	TREAD DEPTH (mm) (32nds)	SERVICE INDEX	STANDARD RIM	OVERALL DIAMETER (mm) (inch)		SECTION WIDTH (mm) (inch)		MAX. LOAD CAPACITY AT COLD INFLATION PRESSURE							
									SINGLE				DUAL			
									(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
7.50R16	G/14	15.5 20	122/118L	6.00G	805	32	215	8	1500	3305	770	112	1320	2910	770	112
8.25R16	H/16	16.0 20	128/124L	6.50H	855	34	235	9	1800	3970	770	112	1600	3525	770	112
8.25R20	H/16	15.5 20	139/137K	6.5	974	38	236	9	2430	5360	930	135	2300	5070	930	135
9.00R20	H/16	16.0 20	144/142K	7.0	1019	40	259	10	2800	6175	900	130	2650	5840	900	130
10.00R20	H/16	15.5 20	146/143K	7.5	1054	41	278	11	3000	6610	830	120	2725	6005	830	120
11.00R20	H/16	16.0 20	150/147K	8.0	1085	43	293	12	3350	7390	830	120	3075	6780	830	120
11.00R20	J/18	16.0 20	152/149K	8.0	1085	43	293	12	3550	7825	930	135	3250	7165	930	135
12.00R20	J/18	17.0 21	154/151K	8.5	1125	44	315	12	3750	8270	830	120	3450	7610	830	120
11R22.5	G/14	18.5 23	144/142L	8.25	1065	42	279	11	2800	6175	720	105	2650	5840	720	105
11R22.5	H/16	18.5 23	148/145L	8.25	1085	42	279	11	3150	6940	850	123	2900	6390	850	123
12R22.5	H/16	18.0 23	150/147L	9.00	1085	43	300	12	3350	7390	830	120	3075	6780	830	120
12R22.5	J/18	18.0 23	152/149L	9.00	1085	43	300	12	3550	7830	930	135	3250	7160	930	135



- Aggressive multi-service, all position tread pattern promises excellent traction in ON/OFF road service
- Outstanding self-cleaning tread design ensures long-life service in ON/OFF road conditions
- Robust tread blocks and rugged casing allows for heavy loads and resist casing penetration and damage



AT557

SIZE	LR/PR	TREAD DEPTH (mm) (32nds)	SERVICE INDEX	STANDARD RIM	OVERALL DIAMETER (mm) (inch)		SECTION WIDTH (mm) (inch)		MAX. LOAD CAPACITY AT COLD INFLATION PRESSURE							
									SINGLE				DUAL			
									(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
12R22.5	H/16	17.5 22	150/147L	9.00	1085	43	300	12	3350	7390	830	120	3075	6780	830	120
12R22.5	J/18	17.5 22	152/149L	9.00	1085	43	300	12	3550	7830	930	135	3250	7160	930	135
315/80R22.5	J/18	17.5 22	154/151L(156/153K)	9.00	1082	43	312	12	3750	8270	830	120	3450	7610	830	120
385/65R22.5	J/18	18.0 23	158L(160K)	11.75	1072	42	389	15	4250	9370	850	125	-	-	-	-
385/65R22.5	L/20	18.0 23	160K(158L)	11.75	1072	42	389	15	4500	9920	900	130	-	-	-	-
425/65R22.5	L/20	18.0 23	165K	13.00	1124	44	430	17	5150	11340	825	120	-	-	-	-
445/65R22.5	L/20	18.0 23	169K	14.00	1150	45	444	17	5800	12775	900	130	-	-	-	-



- Wide, deep tread helps provide long tread life in regional conditions
- Zig-zag ribs ensure even wear and grip on wet, dry and snowy roads



CM973

SIZE	LR/PR	TREAD DEPTH (mm) (32nds)	SERVICE INDEX	STANDARD RIM	OVERALL DIAMETER (mm) (inch)		SECTION WIDTH (mm) (inch)		MAX. LOAD CAPACITY AT COLD INFLATION PRESSURE							
									SINGLE				DUAL			
									(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
11R24.5	H/16	15.0 19	149/146L	8.25	1104	43	279	11	3250	7160	830	120	3000	6610	830	120
10.00R20	H/16	17.5 22	146/143K	7.5	1054	41	278	11	3000	6610	830	120	2725	6005	830	120



- Drive axle tire applicable for rough road service
- Durable tire casing and wide tread enhance tire life
- Open lug design helps deliver super traction in wet and off-road condition



CM923

SIZE	LR/PR	TREAD DEPTH (mm) (32nds)	SERVICE INDEX	STANDARD RIM	OVERALL DIAMETER (mm) (inch)		SECTION WIDTH (mm) (inch)		MAX. LOAD CAPACITY AT COLD INFLATION PRESSURE							
									SINGLE				DUAL			
									(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
13R22.5	J/18	20.0 25	156/150K	9.75	1124	44	320	13	4000	8820	875	128	3350	7390	875	128
13R22.5	J/18	20.0 25	154/151K	9.75	1124	44	320	13	3750	8270	830	120	3450	7610	830	120
315/80R22.5	J/18	20.0 25	154/151M(156/150L)	9.00	1082	43	312	12	3750	8270	830	120	3450	7610	830	120



M Mixed Service
On & Off



M Mixed Service
On & Off



- Aggressive lug design with large block at tread center designed for mining, rock and quarry operations
- Wide tread and special tread compounds resist chipping, chunking, and tearing
- Stone ejector platform prevents trapped stones from punching deeper and piecing belt



CB919

SIZE	LR/PR	TREAD DEPTH (mm) (32nds)	SERVICE INDEX	STANDARD RIM	OVERALL DIAMETER (mm) (inch)	SECTION WIDTH (mm) (inch)	MAX. LOAD CAPACITY AT COLD INFLATION PRESSURE							
							SINGLE				DUAL			
							(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
11.00R20	J/18	25.5 32	152/149F	8.0	1085 43	293 12	3550	7825	930	135	3250	7165	930	135
12.00R20	J/18	25.5 32	154/151F	8.5	1125 44	315 12	3750	8270	830	120	3450	7610	830	120
12.00R20	M/22	25.5 32	158/155C	8.5	1125 44	315 12	4250	9370	970	141	3875	8540	970	141
11R22.5	G/14	23.0 29	144/142G	8.25	1065 42	279 11	2800	6175	720	105	2650	5840	720	105
11R22.5	H/16	23.0 29	148/145J	8.25	1085 42	279 11	3150	6940	850	123	2900	6390	850	123
12R22.5	H/16	23.5 30	150/147F	9.00	1085 43	300 12	3350	7390	830	120	3075	6780	830	120
12R22.5	J/18	23.5 30	152/149F	9.00	1085 43	300 12	3550	7830	930	135	3250	7160	930	135



- Aggressive lug design with large blocks at tread center provides excellent traction and braking on rough roads with mud or gravel and is self-cleaning for ease of maintenance
- Applicable in mining, logging, construction or rock and quarry operations with some very short on high-way use possible
- Special tread compounds resist chipping and chunking in rugged off-road conditions



CB972/E

SIZE	LR/PR	TREAD DEPTH (mm) (32nds)	SERVICE INDEX	STANDARD RIM	OVERALL DIAMETER (mm) (inch)	SECTION WIDTH (mm) (inch)	MAX. LOAD CAPACITY AT COLD INFLATION PRESSURE							
							SINGLE				DUAL			
							(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
9.00R20	H/16	22.0 28	144/142F	7.0	1019 40	259 10	2800	6175	900	130	2650	5840	900	130
10.00R20	H/16	24.0 30	146/143F	7.5	1054 41	278 11	3000	6610	830	120	2725	6005	830	120
11.00R20	J/18	24.5 30	152/149F	8.0	1085 43	293 12	3550	7825	930	135	3250	7165	930	135
12.00R20	J/18	25.5 32	154/151F	8.5	1125 44	315 12	3750	8270	830	120	3450	7610	830	120
12.00R24(CB972E)	J/18	32.0 40	158/155F	8.5	1238 49	315 12	4250	9370	830	120	3875	8550	830	120
12.00R24(CB972E)	L/20	32.0 40	160/157C	8.5	1238 49	315 12	4500	9920	900	131	4125	9090	900	131
11R22.5	G/14	23.0 29	144/142G	8.25	1065 42	279 11	2800	6175	720	105	2650	5840	720	105
11R22.5	H/16	23.0 29	148/145J	8.25	1085 42	279 11	3150	6940	850	123	2900	6390	850	123
12R22.5	H/16	24.5 31	150/147F	9.00	1085 43	300 12	3350	7390	830	120	3075	6780	830	120
12R22.5	J/18	24.5 31	152/149F	9.00	1085 43	300 12	3550	7830	930	135	3250	7160	930	135
11R24.5	G/14	23.0 29	146/143F	8.25	1050 44	279 11	3000	6610	720	105	2725	6005	720	105
11R24.5	H/16	23.0 29	149/146F	8.25	1104 43	279 11	3250	7160	830	120	3000	6610	830	120

- 3 circumferential grooves ensures good directional stability, even wear and smooth ride
- Heavy siping provides good braking stability and high lateral traction on wet and dry surface
- Improved tread compound helps resist tears and ensure good mileage in on and off road use
- Sidewall reinforcing ribs protects against impacts and scuffin



CR926/A/B/D

SIZE	LR/PR	TREAD DEPTH (mm) (32nds)	SERVICE INDEX	STANDARD RIM	OVERALL DIAMETER (mm) (inch)	SECTION WIDTH (mm) (inch)	MAX. LOAD CAPACITY AT COLD INFLATION PRESSURE							
							SINGLE				DUAL			
							(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
7.00R16(CR926)	G/14	11.0 14	118/114M	5.50F	775 31	200 8	1320	2910	770	112	1180	2600	770	112
7.50R16(CR926)	G/14	12.0 15	122/118L	6.00G	805 32	215 8	1500	3305	770	112	1320	2910	770	112
8.25R16(CR926)	G/14	14.0 18	128/126L	6.50H	855 34	235 9	1800	3970	670	97	1700	3750	670	97
8.25R16(CR926)	H/16	14.0 18	128/124L	6.50H	855 34	235 9	1800	3970	770	112	1600	3525	770	112
7.50R20(CR926)	G/14	14.0 18	130/128L	6.0	935 37	215 8	1900	4190	830	120	1800	3970	830	120
8.25R20(CR926)	H/16	15.0 19	139/137K	6.5	974 38	236 9	2430	5360	930	135	2300	5070	930	135
9.00R20	G/14	15.0 19	141/139K	7.0	1019 40	259 10	2575	5675	790	115	2430	5355	790	115
9.00R20	H/16	15.0 19	144/142K	7.0	1019 40	259 10	2800	6175	900	130	2650	5840	900	130
10.00R20	H/16	16.0 20	146/143K	7.5	1054 41	278 11	3000	6610	830	120	2725	6005	830	120
10.00R20	J/18	16.0 20	149/146J	7.5	1054 41	278 11	3250	7160	930	135	3000	6610	930	135
11.00R20	H/16	16.0 20	150/147K	8.0	1085 43	293 12	3350	7390	830	120	3075	6780	830	120
11.00R20	J/18	16.0 20	152/149K	8.0	1085 43	293 12	3550	7825	930	135	3250	7165	930	135
12.00R20(CR926)	J/18	17.5 22	154/151K	8.5	1125 44	315 12	3750	8270	830	120	3450	7610	830	120
12.00R24	J/18	19.0 24	158/155K	8.5	1226 48	315 12	4250	9370	830	120	3875	8550	830	120
12.00R24	L/20	19.0 24	160/157K	8.5	1226 48	315 12	4500	9920	900	131	4125	9090	900	131
11R22.5(CR926D)	G/14	16.8 21	144/142M	8.25	1065 42	279 11	2800	6175	720	105	2650	5840	720	105
11R22.5(CR926D)	H/16	16.8 21	148/145M	8.25	1054 41	279 11	3150	6940	850	123	2900	6390	850	123
12R22.5(CR926)	H/16	16.0 20	150/147L	9.00	1085 43	300 12	3350	7390	830	120	3075	6780	830	120
12R22.5(CR926)	J/18	16.0 20	152/149L	9.00	1085 43	300 12	3550	7830	930	135	3250	7160	930	135
295/80R22.5(CR926D)	J/18	16.0 20	152/149L	9.00	1050 41	298 12	3550	7830	900	131	3250	7160	900	131
315/80R22.5(CR926B)	J/18	16.5 21	154/151M(156/150L)	9.00	1076 42	312 12	3750	8270	830	120	3450	7610	830	120
11R24.5(CR926D)	G/14	16.8 21	146/143L	8.25	1050 44	279 11	3000	6610	720	105	2725	6005	720	105
11R24.5(CR926D)	H/16	16.8 21	149/146L	8.25	1104 43	279 11	3250	7160	830	120	3000	6610	830	120

On-Road Heavy Duty Service

On-Road Highway Service



CR992

SIZE	LR/PR	TREAD DEPTH (mm) (32nds)	STANDARD RIM	OVERALL DIAMETER (mm) (inch)	SECTION WIDTH (mm) (inch)	MAX. LOAD CAPACITY AT COLD INFLATION PRESSURE							
						SINGLE				DUAL			
						(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
7.50-20	G/14	15.5 20	6.00	935 37	215 8	1900	4190	810	115	1700	3750	740	105
8.25-20	G/14	16.5 21	6.50	974 38	236 9	2240	4940	810	115	1950	4300	740	105
9.00-20	H/16	15.0 19	7.00	1018 40	259 10	2900	6390	880	125	2500	5510	810	115
10.00-20	H/16	16.0 20	7.50	1055 42	278 11	3000	6610	810	115	2650	5840	740	105
11.00-20	J/18	16.0 20	8.00	1085 43	293 12	3650	8045	910	130	3150	6940	840	120
12.00-20	J/18	16.0 20	8.50	1125 44	315 12	3750	8270	810	115	3350	7390	740	105



CL951

SIZE	LR/PR	TREAD DEPTH (mm) (32nds)	STANDARD RIM	OVERALL DIAMETER (mm) (inch)	SECTION WIDTH (mm) (inch)	MAX. LOAD CAPACITY AT COLD INFLATION PRESSURE							
						SINGLE				DUAL			
						(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
8.25-20	G/14	14.0 18	6.50	974 38	236 9	2240	4940	810	115	1950	4300	740	105
9.00-20	H/16	16.0 20	7.00	1018 40	259 10	2900	6390	880	125	2500	5510	810	115
10.00-20	H/16	16.0 20	7.50	1055 42	278 11	3000	6610	810	115	2650	5840	740	105
11.00-20	J/18	17.0 21	8.00	1085 43	293 12	3650	8045	910	130	3150	6940	840	120
12.00-20	J/18	17.5 22	8.50	1125 45	315 12	3750	8270	810	115	3350	7390	740	105
13.00-20	J/18	19.0 24	9.00	1177 46	340 13	4250	9370	770	110	3750	8270	700	100
14.00-20	J/18	19.0 24	10.00	1240 49	357 14	4625	10200	670	95	4000	8820	600	85
12.00-24	J/18	17.5 22	8.50	1225 48	315 12	4250	9370	810	115	3750	8270	740	105



CR952

SIZE	LR/PR	TREAD DEPTH (mm) (32nds)	STANDARD RIM	OVERALL DIAMETER (mm) (inch)	SECTION WIDTH (mm) (inch)	MAX. LOAD CAPACITY AT COLD INFLATION PRESSURE							
						SINGLE				DUAL			
						(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
9.00-20	H/16	17.5 22	7.00	1038 41	259 10	2900	6390	880	125	2500	5510	810	115
10.00-20	H/16	19.0 24	7.50	1073 42	278 11	3000	6610	810	115	2650	5840	740	105
11.00-20	H/16	19.0 24	8.00	1105 44	293 12	3350	7390	810	115	2900	6395	740	105



CR942

SIZE	LR/PR	TREAD DEPTH (mm) (32nds)	STANDARD RIM	OVERALL DIAMETER (mm) (inch)	SECTION WIDTH (mm) (inch)	MAX. LOAD CAPACITY AT COLD INFLATION PRESSURE							
						SINGLE				DUAL			
						(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
8.25-20	G/14	14.0 18	6.50	974 38	236 9	2240	4940	810	115	1950	4300	740	105
9.00-20	G/14	14.0 18	7.00	1018 40	259 10	2575	5675	770	110	2300	5070	700	100
9.00-20	H/16	15.0 18	7.00	1018 40	259 10	2900	6390	880	125	2500	5510	810	115
10.00-20	H/16	15.0 19	7.50	1055 42	278 11	3000	6610	810	115	2650	5840	740	105



CR949/A

SIZE	LR/PR	TREAD DEPTH (mm) (32nds)	STANDARD RIM	OVERALL DIAMETER (mm) (inch)	SECTION WIDTH (mm) (inch)	MAX. LOAD CAPACITY AT COLD INFLATION PRESSURE							
						SINGLE				DUAL			
						(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
9.00-20	H/16	15.0 19	7.00	1018 40	259 10	2900	6390	880	125	2500	5510	810	115
10.00-20	H/16	16.0 20	7.50	1055 42	278 11	3000	6610	810	115	2650	5840	740	105



CL977

SIZE	LR/PR	TREAD DEPTH (mm) (32nds)	STANDARD RIM	OVERALL DIAMETER (mm) (inch)	SECTION WIDTH (mm) (inch)	MAX. LOAD CAPACITY AT COLD INFLATION PRESSURE							
						SINGLE				DUAL			
						(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
9.00-20	H/16	15.5 20	7.00	1018 40	259 10	2900	6390	880	125	2500	5510	810	115
10.00-20	H/16	16.0 20	7.50	1055 42	278 11	3000	6610	810	115	2650	5840	740	105
11.00-20	J/18	17.0 21	8.00	1085 43	293 12	3650	8045	910	130	3150	6940	840	120
12.00-20	J/18	17.0 21	8.50	1125 44	315 12	3750	8270	810	115	3350	7390	740	105

LIMITED FREE REPLACEMENT WARRANTY

Zhongce Rubber Group Co., Ltd. warrants to the original purchaser that every new radial truck tire bearing the brand of “CHAOYANG”, “GOODRIDE”, “WESTLAKE” and “YARTU” will be free from defects in materials and workmanship. This warranty is limited to FIVE (5) year from the original date of manufacture. Any tire adjusted utilizing this limited free replacement warranty will be replaced at no charge if the tire fails during the first 2/32nds of an inch of original tread depth, due to a defect in materials and/or workmanship. This warranty is limited to the respective usable original tread depth, which is the original tread depth reduced by the Tread Wearing Index (TWI) depth.

TERMS & CONDITIONS

1. All radial truck tire warranties are limited to the original purchaser and the original vehicle on which they were mounted and are not assignable to subsequent purchasers or vehicles. Original receipts must accompany all claims.

2. Zhongce Rubber Group Co., Ltd. warrants that every new radial truck tire in the brand of “CHAOYANG”, “GOODRIDE”, “WESTLAKE” and “YARTU” sold by Hangzhou Zhongce Rubber Co., Ltd. in the United States will be free of defects in workmanship and/or materials.

3. The cost of mounting, balancing and any other charges by the dealer in connection with the replacement of the tire are required to be paid by the purchaser. The purchaser is also required to pay all applicable Federal, State/Provincial and local taxes.

4. What is not covered:

Exclusions this limited warranty does not apply to tire failures from:

- Road Hazards (ie: punctures, snag, cut, impact breaks, etc)
- Misalignment
- Improper inflation
- Wreck
- Collision
- Theft
- Fire
- Willful abuse
- Claims for ozone or weather cracks during original tread life on tires more than 3 years from date of manufacture
- Mechanical defects (such as brakes, shocks, worn steering and/or suspension parts, rim, etc..)
- Vandalism
- Overload
- Use of improper rim
- Improper mounting/dismounting
- Chemical contamination
- Misuse/Misapplication

NOR DOES THIS LIMITED WARRANTY APPLY TO ANY RADIAL TRUCK TIRES:

- With the serial # buffed or cut
- Marked blemish or NA (No Adjustment)
- Purchased or used outside the United States
- With remaining tread in any groove equal or less than Tread Wearing Index (TWI) depth
- With a ride complaint that occurs after the first 2/32nds of tread wear
- Retreaded with less than TWI depth of an inch of tread

Truck Tire Casings will be warranted against defects in material and/or workmanship through 100% of the first retread for a period of five years from the date of manufacture.

The following casing allowance will be applied to truck tires in the brands of “CHAOYANG”, “GOODRIDE”, “WESTLAKE” and “YARTU” in normal over the road service and manufactured after July 1, 2010.

For CR915 trailer application, the casing will be warranted through the first and second retread for a period of five years from the date of manufacture.

Size	Casing Allowance
LIGHT TRUCK	
8.5, 9.5R17.5	\$15.00
8R19.5	\$15.00
TUBELESS MEDIUM TRUCK	
8, 9, 10R22.5	\$35.00
11, 12R22.5	\$50.00
11R24.5, 13R22.5	\$50.00
TUBELESS LOW PROFILE	
205, 215, 225, 235/75R17.5	\$20.00
225, 245, 265/70R19.5	\$25.00
255, 275/70R22.5	\$50.00
295/75R22.5	\$50.00
295/80R22.5	\$50.00
315/80R22.5	\$50.00
385, 425, 445/65R22.5	\$60.00
285/75R24.5	\$50.00
TUBE TYPE	
10.00R20	\$35.00

PURCHASER OBLIGATIONS

In order to be eligible for the limited warranty service, the purchaser must:

1. Present the defective tire to an authorized dealer from whom the original purchase was made.
2. Present proof of purchase to the satisfaction of the dealer.
3. Complete and sign a warranty claim form which is available at any authorized dealer.
4. Retain and present the warranty card along with proof of date and place of purchase in order to make a claim. The authorized dealer's name and address from whom the tires were purchased must be also included on the warranty form.
5. At the time of purchase the tire(s) must be properly installed with proper air pressure and the wheels balanced.

DISCLAIMER

This warranty or any warranty stated or referred to herein, is exclusive and in lieu of any other warranty regarding the quality of the tires, whether expressed or implied and remedies for breach thereof shall be limited to those specifically provided herein.